


## EC1004C EPOXY COATED CHIP THERMISTOR

- \* 10k ohms at 25°C
- \* STI Curve C Material
- \* Beta (25/85) = 3690 K
- \* Temperature Range -40°C to +150°C
- \* Thermally conductive epoxy coating
- \* Max OD .095"

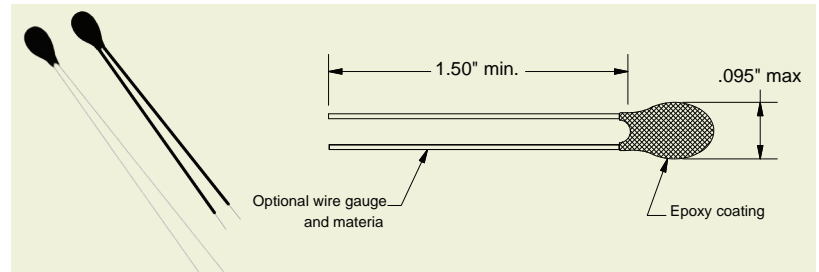

EC1004C-A30B	
Wire Gauge	AWG #30
Wire Type	Tin-plated Nickel Alloy
Interchangeability	±0.2°C from 0°C to 70°C

EC1004C-C28B	
Wire Gauge	AWG #28
Wire Type	Tin-plated Copper
Interchangeability	±0.2°C from 0°C to 70°C

*Note: Also available in ±0.1°C and ±0.5°C*

FEATURES
* Proven high reliability
* Fast thermal response time
* Rugged construction
* Alloy lead wires for reduced stem effect
* Suitable for precision instrumentation
* Used extensively in temperature sensing probes / assemblies

MATERIAL		C	
(°C)	(°F)	Resistance (Ω)	TCR (%/°C)
-40	-40	239,830	-5.91
-30	-22	135,230	-5.55
-20	-4	78,930	-5.22
-10	14	47,550	-4.92
0	32	29,490	-4.64
10	50	18,780	-4.38
20	68	12,270	-4.14
25	77	10,000	-4.03
30	86	8,196	-3.92
40	104	5,593	-3.72
50	122	3,893	-3.53
60	140	2,760	-3.35
70	158	1,990	-3.19
80	176	1,458	-3.04
90	194	1,084	-2.89
100	212	8,172	-2.76
110	230	6,241	-2.63
120	248	4,824	-2.52
130	266	3,772	-2.41
140	284	2,981	-2.30
150	302	2,380	-2.20

*Contact STI Engineering for R v T tables in other increments*

Revision - 2018-03-13

### SENSING TECHNOLOGIES, INC.

5582 Enterprise Parkway, Fort Myers, FL 33905 ♦ Tel: 239-600-6633 ♦ Fax: 239-694-0031

Email: sales@sensing-tech.com ♦ www.sensing-tech.com