


EC3003Z EPOXY COATED CHIP THERMISTOR

- * 3000 ohms at 25°C
- * STI Curve Z Material
- * Beta (25/85) = 3976 K
- * Temperature Range -40°C to +150°C
- * Thermally conductive epoxy coating
- * Max OD .095"

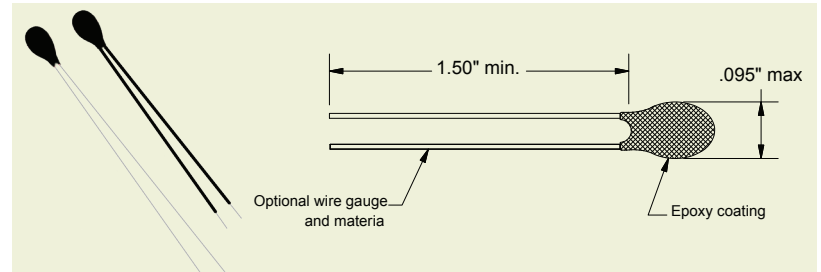

EC3003Z-A30B	
Wire Gauge	AWG #30
Wire Type	Tin-plated Nickel Alloy
Interchangeability	±0.2°C from 0°C to 70°C

EC3003Z-C28B	
Wire Gauge	AWG #28
Wire Type	Tin-plated Copper
Interchangeability	±0.2°C from 0°C to 70°C

Note: Also available in ±0.1°C and ±0.5°C

FEATURES
* Proven high reliability
* Fast thermal response time
* Rugged construction
* Alloy lead wires for reduced stem effect
* Suitable for precision instrumentation
* Used extensively in temperature sensing probes / assemblies

MATERIAL		Z	
(°C)	(°F)	Resistance (Ω)	TCR (%/°C)
-40	-40	100,950	-6.65
-30	-22	53,094	-6.21
-20	-4	29,124	-5.81
-10	14	16,596	-5.44
0	32	9,795	-5.11
10	50	5,970	-4.80
20	68	3,747	-4.52
25	77	3,000	-4.39
30	86	2,417.10	-4.26
40	104	1,597.80	-4.02
50	122	1,080.90	-3.81
60	140	746.1	-3.61
70	158	525.3	-3.42
80	176	376.5	-3.24
90	194	274.8	-3.08
100	212	203.4	-2.92
110	230	153.3	-2.77
120	248	117	-2.64
130	266	90.3	-2.52
140	284	70.5	-2.41
150	302	55.8	-2.30

Contact STI Engineering for R v T tables in other increments

Revision - 2018-03-13

SENSING TECHNOLOGIES, INC.

5582 Enterprise Parkway, Fort Myers, FL 33905 ♦ Tel: 239-600-6633 ♦ Fax: 239-694-0031

Email: sales@sensing-tech.com ♦ www.sensing-tech.com