


## EC2253Z EPOXY COATED CHIP THERMISTOR

- \* 2252 ohms at 25°C
- \* STI Curve Z Material
- \* Beta (25/85) = 3976 K
- \* Temperature Range -40°C to +150°C
- \* Thermally conductive epoxy coating
- \* Max OD .095"

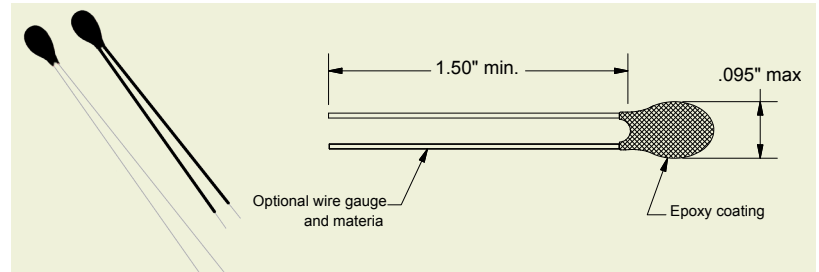

EC1004Z-A30B	
Wire Gauge	AWG #30
Wire Type	Tin-plated Nickel Alloy
Interchangeability	±0.2°C from 0°C to 70°C

EC1004Z-C28B	
Wire Gauge	AWG #28
Wire Type	Tin-plated Copper
Interchangeability	±0.2°C from 0°C to 70°C

*Note: Also available in ±0.1°C and ±0.5°C*

FEATURES
* Proven high reliability
* Fast thermal response time
* Rugged construction
* Alloy lead wires for reduced stem effect
* Suitable for precision instrumentation
* Used extensively in temperature sensing probes / assemblies

MATERIAL		Z	
(°C)	(°F)	Resistance (Ω)	TCR (%/°C)
-40	-40	75,780	-6.65
-30	-22	39,856	-6.21
-20	-4	21,862	-5.81
-10	14	12,458	-5.44
0	32	7,353	-5.11
10	50	4,481	-4.80
20	68	2,813	-4.52
25	77	2,252	-4.39
30	86	1,814	-4.26
40	104	1,199	-4.02
50	122	811.4	-3.81
60	140	560.1	-3.61
70	158	394.3	-3.42
80	176	282.6	-3.24
90	194	206.3	-3.08
100	212	152.7	-2.92
110	230	115.1	-2.77
120	248	87.83	-2.64
130	266	67.79	-2.52
140	284	52.92	-2.41
150	302	41.89	-2.30

*Contact STI Engineering for R v T tables in other increments*

Revision - 2018-07-12

### SENSING TECHNOLOGIES, INC.

5582 Enterprise Parkway, Fort Myers, FL 33905 • Tel: 239-600-6633 • Fax: (814) 834-9483  
Email: sales@sensing-tech.com • www.sensing-tech.com