


# RPT1002G THIN FILM PLATINUM RTD ELEMENT

- \* 100 ohms at 0°C
- \* 3850 ppm/K Temp. Coefficient of Resistance
- \* Temperature Range -70°C to +500°C
- \* Can be used up to 550°C intermittent
- \* Designed for large quantity applications

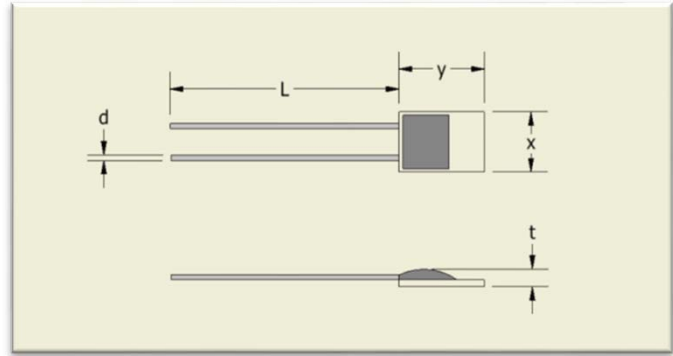

STI PART NUMBER	DIN CLASS
RPT1002GA1	A
RPT1002GB1	B
RPT1002GC1	1/3 B

DIMENSIONS	(mm)
x	1.25
y	1.70
t	0.8
L	10.0
d	0.15

(°C)	Resistance (Ω)	DIN Class A		DIN Class B	
		± °C	± Ω	± °C	± Ω
-50	80.31	0.25	0.10	0.55	0.22
-25	90.19	0.20	0.08	0.43	0.17
0	100.00	0.15	0.06	0.30	0.12
25	109.74	0.20	0.08	0.43	0.13
50	119.40	0.25	0.10	0.55	0.21
75	128.99	0.30	0.11	0.68	0.26
100	138.51	0.35	0.13	0.80	0.30
125	147.95	0.40	0.15	0.93	0.35
150	157.33	0.45	0.17	1.05	0.39
175	166.63	0.50	0.19	1.18	0.44
200	175.86	0.55	0.20	1.30	0.48
225	185.01	0.60	0.22	1.43	0.52
250	194.10	0.65	0.24	1.55	0.56
275	203.11	0.70	0.25	1.68	0.60
300	212.05	0.75	0.27	1.80	0.64
325	220.92	0.80	0.28	1.93	0.68
350	229.72	0.85	0.30	2.05	0.72
375	238.44	0.90	0.31	2.18	0.76
400	247.09	0.95	0.33	2.30	0.79
425	255.67	1.00	0.34	2.43	0.83
450	264.18	1.05	0.36	2.55	0.86
475	272.61	1.10	0.37	2.68	0.90
500	280.98	1.15	0.38	2.80	0.93

\* Lead wire material is platinum clad nickel  
Suitable for welding, crimping or brazing

\* Suggested measuring current:  
0.3 mA to 1.0 mA to prevent self-heating

\* Operating temperature range (continuous):  
DIN Class B: -70°C to +500°C  
DIN Class A: -50°C to +300°C  
DIN Class 1/3B: 0°C to +150°C

\*\* This table available in other temperature ranges and increments.

Sensing Technologies, Inc.  
5582 Enterprise Parkway  
Fort Myers, FL 33905  
TEL 239-600- 6633  
FAX 239-694-0031

Sensing Technologies, Inc.  
1028 Graphite Road  
St. Marys, PA 15857  
TEL: 814-834-9480  
FAX: 814-834-1556

For engineering assistance, contact  
[jsidoni@sensing-tech.com](mailto:jsidoni@sensing-tech.com)